



CADDY CORPORATION

Food Service Equipment

Air Systems

Transfer, Storage, and Bussing Caddys



Tray & Silver Caddys for

Cafeteria Self-Service
with Cylinder-Type Silverware Dispensers





PROJECT:



LOCATION:



T-402
Capacity:
10 Cutlery Cylinders
190 Trays up to 15" x 20"



T-404
Capacity:
10 Cutlery Cylinders
120 Trays up to 15" x 20"



T-414
Capacity:
8 Cutlery Cylinders
195 Trays up to 15" x 20"

General Specifications

Tray & Silver Caddy to be Caddy Corporation model T-_____.

Frame to be of 1" O.D. 16 gauge stainless steel. Shelf to be 8" above the floor, of 18 gauge stainless steel with raised rounded edges on all sides, flanged down to form a 1-1/2" wide channel. Shelf corners shaped to fit contour of tubular frame and continuously welded to each leg at all contact points, which eliminates unsanitary crevices. Casters to be 4" diameter heavy-duty swivel type with 3/4" stems and polyurethane tires. Housing for cutlery receptacles to be of 18 gauge stainless steel with 16 gauge stainless steel end enclosures and supports of all welded construction. Top of cutlery housing provided with die-stamped reinforced openings for standard perforated plastic cutlery cylinders.

Unit to be provided with the following accessories:

Accessories

- ☐ **ACC-36** - Removable stainless steel napkin dispenser affixed to side of cutlery housing.
- ☐ **ACC-37**** - Fold away auxiliary shelf to be 9-1/2" wide, of 16 gauge stainless steel. Available on either or both sides.
- ☐ **ACC-38** - set of four circular leg bumpers. (Add 4" to length and width)
- ☐ **ACC-41** - Caster brakes on two diagonal casters.
- ☐ **ACC-47*** - Vinyl cover encloses entire caddy down to just below under shelf.
- ☐ **ACC-49**** - Perforated plastic cutlery cylinders. Approximate capacity per cylinder: 48 knives, 36 forks, or 40 spoons.

* Specify for which model
** Specify quantity required



CADDY CORPORATION

509 Sharptown Road P.O. Box 345
Bridgeport, NJ 08014-0345
Tel: 856-467-4222 Fax: 856-467-5511
internet: www.caddycorp.com



Tray & Silver Caddys

Mobile Units with Pan-Type Silverware Dispensers
and Counter Top Units



PROJECT:

LOCATION:



T-301

Capacity:
40 Dozen Cutlery Pieces
190 Trays up to 15" x 20"
Height : 3' 8"



T-303

Capacity:
80 Dozen Cutlery Pieces
190 Trays up to 15" x 20"
Height: 4' 2-1/4"

Mobile Unit General Specifications

Tray & Silver Caddy to be Caddy Corporation model T-_____.

Frame to be of 1" O.D. 16 gauge stainless steel. Shelf to be 8" above the floor, of 18 gauge stainless steel with raised rounded edges on all sides, flanged down to form a 1-1/2" wide channel. Shelf corners shaped to fit contour of tubular frame and continuously welded to each leg at all contact points, which eliminates unsanitary crevices. Casters to be 4" diameter heavy-duty swivel type with 3/4" stems and polyurethane tires. Housing for cutlery receptacles to be of 18 gauge stainless steel with 16 gauge stainless steel end enclosures and supports of all welded construction.

T-301 specifications:

Cutlery housing fitted with double folding covers of fiberglass reinforced plastic with 18 gauge stainless steel hinges. Unit to be furnished with four removable pans. Pans to be seamless 304 type stainless with No. 4 finish. Each pan to measure 11-1/2" x 6" x 4" deep.

T-303 specifications:

Cutlery housing to have front and back folding covers of fiberglass reinforced plastic with 18 gauge stainless steel hinges. Unit to be furnished with eight removable pans. Pans to be seamless 304 type stainless with No. 4 finish. Each pan to measure 11-1/2" x 6" x 4" deep.

Counter Top General Specifications

Counter Top Cutlery Dispenser to be Caddy Corporation model T-_____. Unit to be 20 gauge stainless steel with 16 gauge stainless steel end enclosures and supports of all welded construction and set on non-slip rubber feet.



T-400

Capacity:
10 Cutlery Cylinders


T-400 specifications:

Sloped top provided with ten die-stamped reinforced openings for standard perforated plastic cutlery cylinders.

Unit to be provided with the following accessories:


Accessories

- ☐ **ACC-49*** - Perforated plastic cutlery cylinders. Approximate capacity per cylinder: 48 knives, 36 forks, or 40 spoons.



T-320 specifications:

Unit to be fitted with double folding covers of fiberglass reinforced plastic with 18 gauge stainless steel hinges. Unit to be furnished with four removable pans. Pans to be seamless 304 type stainless with No. 4 finish. Each pan to measure 11-1/2" x 6" x 4" deep.



T-320




Capacity:
40 Dozen Cutlery Pieces



CADDY CORPORATION

509 Sharptown Road P.O. Box 345
Bridgeport, NJ 08014-0345
Tel: 856-467-4222 Fax: 856-467-5511
internet: www.caddycorp.com

* Specify quantity required

Bulk Silver Caddys
Pan-Type and Cylinder-Type**T-305**Capacity:
120 Dozen Cutlery Pieces
Height = 2' 6-3/4"**T-407**Capacity:
30 Cutlery Cylinders
Height = 2' 10-3/4"

Provide bulk
storage,
transportation and
dispensing in
cafeterias, dining
rooms, and
banquet rooms for
waiters or patron
self service.

General Specifications

Bulk Silver Caddy to be Caddy Corporation model T-_____.

Continue for

T-305 specifications:

Frame to be 1" O.D. 16 gauge stainless steel tubular construction. Casters to be 4" diameter heavy-duty swivel type with 3/4" stems and polyurethane tires.

Shelves to be of 12 gauge stainless steel entirely welded seamlessly with cutouts. Shelf corners shaped to fit contour of tubular frame and continuously welded to each leg at all contact points, which eliminates unsanitary crevices. Bottom shelf to be 15" above the floor and upper shelf to be 28" above the floor. Unit to be furnished with eight removable pans. Pans to be seamless 304 type stainless with No. 4 finish. Each pan to measure 11-1/2" x 6" x 6" deep.

Unit to be provided with the following accessories:

Accessories

- ☐ **ACC-42** - Top and Bottom Shelf Covers to each be provided with a double hinged fiberglass folding cover with lock and key. Hinges to be 16 gauge stainless steel. Locks to be chrome plated brass.
- ☐ **ACC-38** - Circular bumpers. (Add 4" to length and width)
- ☐ **ACC-41** - Caster brakes on two diagonal casters.
- ☐ **ACC-47*** - Vinyl Drape

Continue for

T-407 specifications:

Frame to be of 1" O.D. 16 gauge stainless steel. Casters to be 4" diameter heavy-duty swivel type with 3/4" stems and polyurethane tires.

Shelves to be 16 gauge stainless steel with raised rounded edges on all sides, flanged down to form a 1-1/2" wide channel. Bottom shelf to be 12-1/2" from floor with 14-5/8" clearance between shelves. Shelf corners shaped to fit contour of tubular frame and continuously welded to each leg at all contact points, which eliminates unsanitary crevices. Each shelf to have 15 die-stamped reinforced openings for standard perforated plastic cutlery cylinders.

Unit to be provided with the following accessories:

Accessories

- ☐ **ACC-49**** - Perforated plastic cutlery cylinders. Approximate capacity per cylinder: 48 knives, 36 forks, or 40 spoons.
- ☐ **ACC-41** - Caster brakes on two diagonal casters.
- ☐ **ACC-38** - Circular bumpers. (Add 4" to length and width)
- ☐ **ACC-47*** - Vinyl Drape



* Specify model # T-305 or T-407 ** Specify quantity required

**CADDY CORPORATION**509 Sharptown Road P.O. Box 345
Bridgeport, NJ 08014-0345
Tel: 856-467-4222 Fax: 856-467-5511
internet: www.caddycorp.com

* Specify model # T-305 or T-407

**Dish Caddys**
Single Compartment

Dish and Tray Caddys are designed to make storing, moving, and dispensing dishes easy. At less than 31" high, they can store under counters or serving tables, requiring no extra floor space. Fold away covers permit access to dishes from the top as well as the front of each unit.

T-130
T-140T-135
T-145TH-130
TH-140

Dimensions				Plate Qty.*			
Model	Length	Width	Height	9"	7"	6"	5"
T-130, T-135 TH-130	25 $\frac{1}{2}$ "	15 $\frac{3}{4}$ "	30"	80	120	120	160
T-140, T-145 TH-140	35 $\frac{1}{2}$ "	15 $\frac{3}{4}$ "	30"	120	160	200	240

* Actual capacities vary with shape of object to be dispensed.

Electrical Data				NEMA	
Model	Volts	ϕ	Amps	Plug	Outlet**
TH-130 TH-140	120	1	4.1	5-15P	5-15R
	208		2.4	6-15P	6-15R
	240		2.0	6-15P	6-15R

** Outlet not supplied by Caddy Corporation.

General Specifications

Dish Caddy to be Caddy Corporation model
T-_____.

Unit to be constructed of 16 gauge stainless steel with rounded coved corner interior. Frame to be 1" O.D. 16 gauge stainless steel tubing and fitted with 4" diameter heavy-duty swivel type casters with 3/4" stems and polyurethane tires. Stainless steel spacers to be between tubular frame and body to eliminate dirt pockets. Sides to have continuous neoprene bumpers set into stainless steel channel frames. All stainless steel to be type 304 with No. 4 finish and be all welded construction.

Enclosed model specifications:

Dish Caddy to be fitted with folding covers, for sanitary dish storage, of 1/8" thick fiberglass reinforced plastic, fastened with 16 gauge stainless steel hinges. Covers furnished with self-operating positive locking clips. Covers shall not protrude beyond frame of unit when in open position.

Heated model specifications:

Heating element to be 500 watts, mounted under plate storage compartments. Heating element and wiring to be completely concealed. Electrical control box to be stainless steel and installed for easy removal for service. Control box to include infinite Hi-Lo heat control for temperature settings 1 through 9 and a recessed male three-pronged NEMA twist-lock receptacle. Unit to be supplied with a 6'-0" long cord with a NEMA twist-lock female connector.

Heated units only to be certified by Intertek.



Unit to be provided with the following accessories:

Accessories

Partitions - Adjustable stainless steel sliding partitions hold dishes in place and reduce noise; especially desirable for use with bowls, irregularly shaped dishes or for use over ramps or rough floors. Partitions hand-adjust to any size dish, may be completely moved to either end or removed to provide full open compartment.

- ☐ **ACC-23***** - Three compartment partition set.
- ☐ **ACC-33***** - Four compartment partition set.
- ☐ **ACC-25****** - Three compartment partition set.
- ☐ **ACC-35****** - Four compartment partition set.
- ☐ **ACC-38** - Circular bumpers. (Add 4" to length and width)
- ☐ **ACC-93** - Stainless steel doors

*** To be used with model #T-130, T-135, & TH-130

**** To be used with model #T-140, T-145, & TH-140

**CADDY CORPORATION**

509 Sharptown Road P.O. Box 345
Bridgeport, NJ 08014-0345
Tel: 856-467-4222 Fax: 856-467-5511
internet: www.caddycorp.com



Dish & Tray Caddys

Twin Compartment Stores on 2 Sides



PROJECT:

LOCATION:

Dish and Tray Caddys are designed to make storing, moving, and dispensing dishes and trays easy. At less than 31" high, they can store under counters or serving tables requiring no extra floor space. Fold away covers permit access to dishes from the top as well as the front of each unit.



T-150
T-175



T-160
T-170



TH-160
TH-170

Dimensions				Plate Qty.*				Tray Qty.*	Electrical Data				NEMA	
Model	Length	Width	Height	9"	7"	6"	5"	10" x 14"	Model	Volts	φ	Amps	Plug	Outlet**
T-150, T-160 TH-160	25 3/4"	26 1/4"	30 1/4"	160	240	240	320	100	TH-160 TH-170	120	1	8.3	5-15P	5-15R
T-170, T-175 TH-170	35 1/2"	26 1/4"	30 1/4"	240	320	400	480	200		208		4.8	5-15P	5-15R
										240		4.1	5-15P	5-15R

* Actual capacities vary with shape of object to be dispensed.

** Outlet not supplied by Caddy Corporation.

General Specifications

Dish & Tray Caddy to be Caddy Corporation model T-_____.

Unit to be constructed of 16 gauge stainless steel with rounded coved corner interior. Frame to be 1" O.D. 16 gauge stainless steel tubing and fitted with 4" diameter heavy-duty swivel type casters with 3/4" stems and polyurethane tires. Stainless steel spacers to be between tubular frame and body to eliminate dirt pockets. Front and back to have continuous neoprene bumpers set into stainless steel channel frames. All stainless steel to be type 304 with No. 4 finish and be all welded construction.

Enclosed model specifications:

Dish & Tray Caddy to be fitted with folding covers, for sanitary dish storage, of 1/8" thick fiberglass reinforced plastic, fastened with 16 gauge stainless steel hinges. Covers furnished with self-operating positive locking clips. Covers shall not protrude beyond frame of unit when in open position.

Heated model specifications:

Heating element to be 1 KW, mounted under plate storage compartments. Heating element and wiring to be completely concealed. Electrical control box to be stainless steel and installed for easy removal for service. Control box to include infinite Hi-Lo heat control for temperature settings 1 through 9 and a recessed male three-pronged NEMA twist-lock receptacle. Unit to be supplied with a 6'-0" long cord with a NEMA twist-lock female connector.

Heated units only to be certified by Intertek.



Unit to be provided with the following accessories:

Accessories

Partitions - Adjustable stainless steel sliding partitions hold dishes in place and reduce noise; especially desirable for use with bowls, irregularly shaped dishes or for use over ramps or rough floors. Partitions hand-adjust to any size dish, may be completely moved to either end or removed to provide full open compartment. Two sets are required for each Dish & Tray Caddy.

- ☐ **ACC-23***** - Three compartment partition set.
- ☐ **ACC-33***** - Four compartment partition set.
- ☐ **ACC-25****** - Three compartment partition set.
- ☐ **ACC-35****** - Four compartment partition set.
- ☐ **ACC-38** - Circular bumpers. (Add 4" to length and width)
- ☐ **ACC-93** - Stainless steel doors

*** To be used with model #T-150, T-160, & TH-160

**** To be used with model #T-170, T-175, & TH-170



CADDY CORPORATION


509 Sharptown Road P.O. Box 345
Bridgeport, NJ 08014-0345
Tel: 856-467-4222 Fax: 856-467-5511
internet: www.caddycorp.com



Multi-Purpose Caddys for Dishes, glasses, cups, saucers & trays



- T-190 enclosed model
T-195 open model
TH-190 enclosed model (heated)



TH-190
Shown

General Specifications

Multi-Purpose Caddy to be Caddy Corporation model
T-_____.

Unit to be constructed of 16 gauge stainless steel with rounded covered corner interior and 18 gauge stainless steel undershelf for empty tray and rack storage. Frame to be 1" O.D. 16 gauge stainless steel tubing and fitted with 4" diameter heavy-duty swivel type casters with 3/4" stems and polyurethane tires. Stainless steel spacers to be between tubular frame and body to eliminate dirt pockets. Front and back to have continuous neoprene bumpers set into stainless steel channel frames. All stainless steel to be type 304 with No. 4 finish and be all welded construction.

Enclosed Model Specifications:

Multi-Purpose Caddy for sanitary storage, to be fitted with folding covers of 1/8" thick fiberglass reinforced plastic, fastened with 16 gauge stainless steel hinges. Covers furnished with self-operating positive locking clips. Covers shall not protrude beyond frame of unit when in open position.

Heated Model Specifications:

Heating element to be 1 KW, mounted under storage compartment. Heating element and wiring to be completely concealed. Electrical control box to be stainless steel and installed for easy removal for servicing. Control box to include infinite Hi-Lo heat control for temperature settings 1 through 9 and a recessed male three-pronged NEMA twist-lock receptacle. Unit to be supplied with a 6'-0" long cord with a NEMA twist-lock female connector.

Unit to be provided with the following accessories:

Accessories

- ☐ **ACC-38** - Circular bumpers. (Add 4" to length and width)

Dimensions			
Model	Length	Width	Height
T-190, T-195, TH-190	39 $\frac{3}{4}$ "	27 $\frac{1}{4}$ "	40 $\frac{3}{4}$ "


Electrical Data				NEMA	
Model	Volts	ϕ	Amps	Plug	Outlet*
TH-190	120	1	8.3	5-15P	5-15R
	208		4.8	5-15P	5-15R
	240		4.1	5-15P	5-15R

** Outlet not supplied by Caddy Corporation.


Heated units only to be certified by Intertek.



Multi-Purpose Caddy Capacities***




Cups:




Dishes:

300 10" plates
300 9" plates
600 7" plates
750 6" plates




Cups & Saucers:
126 cups in 20" x 20" racks
and 126 saucers



Trays:

160 trays up to 18" x 22"



Cups or Glasses:
120 cups or 216 glasses in
10" x 20" racks

*** Actual capacities vary with shape of object to be dispensed.



CADDY CORPORATION

509 Sharptown Road P.O. Box 345
Bridgeport, NJ 08014-0345
Tel: 856-467-4222 Fax: 856-467-5511
internet: www.caddycorp.com

* Not available with model TH-190


Cup & Saucer Caddys for Dispensing from underneath beverage stations



- Space saver • Speeds service
- Keeps aisles clear
- Undershelf for empty cup tray storage



T-170-SU

T-160-SU
T-170-SU

Dimensions			
Model	Length	Width	Height
T-160-SU	25 $\frac{3}{4}$ "	26 $\frac{1}{4}$ "	30"
T-170-SU	35 $\frac{1}{2}$ "	26 $\frac{1}{4}$ "	30"

General Specifications

Cup & Saucer Caddy to be Caddy Corporation model T-_____.

Unit to be constructed of 16 gauge stainless steel with rounded covered corner interior and wire undershelf for empty tray storage. Frame to be 1" O.D. 16 gauge stainless steel tubing and fitted with 4" diameter heavy-duty swivel type casters with 3/4" stems and polyurethane tires. Stainless steel spacers to be between tubular frame and body to eliminate dirt pockets. Front and back to have continuous neoprene bumpers set into stainless steel channel frames. All stainless steel to be type 304 with No. 4 finish and be all welded construction.


Cup & Saucer Caddy to be fitted with folding covers, for sanitary dish storage, of 1/8" thick fiberglass reinforced plastic, fastened with 16 gauge stainless steel hinges. Covers furnished with self-operating positive locking clips. Covers shall not protrude beyond frame of unit when in open position.

Unit to be provided with the following accessories:


Accessories

- ☐ **ACC-38** - Circular bumpers. (Add 4" to length and width)


Suggested Cup & Saucer Caddy Combinations




Total Capacity:**
112 cups
240 saucers



Total Capacity:**
224 cups

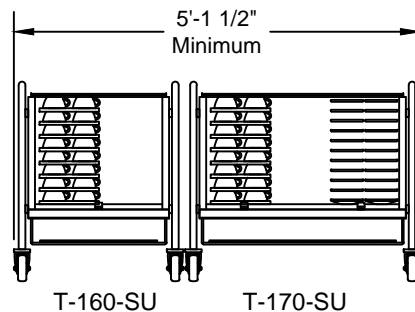

Total Capacity:**
224 cups
160 saucers

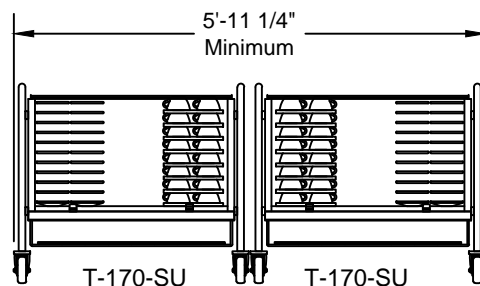

Total Capacity:**
224 cups
320 saucers

** Actual capacities vary with shape of object to be dispensed.



CADDY CORPORATION

509 Sharptown Road P.O. Box 345
Bridgeport, NJ 08014-0345
Tel: 856-467-4222 Fax: 856-467-5511
internet: www.caddycorp.com




Rack Caddy forInsulated plastic underplates or
Dome covers

PROJECT:



LOCATION:

- Space saver
- Mobile
- Convenient

Facilitates dispensing of plastic underplates or dome covers in the central tray make-up procedure. Rack Caddys are furnished with removable cradles. Cradles can be placed on top of standard 20" x 20" dishwasher racks for washing in rack-type dishwashing machines. Soiled underplates can be loaded into the cradles for washing and removed, in bulk, to the Rack Caddy for storage and reuse. Spare cradles may be ordered to eliminate repeated cradle transfer.

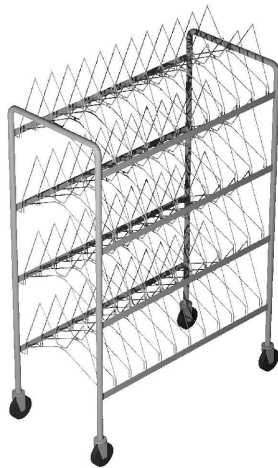

T-540
Capacity:
240 underplates
80 dome covers
Height = 5' 1-1/4"

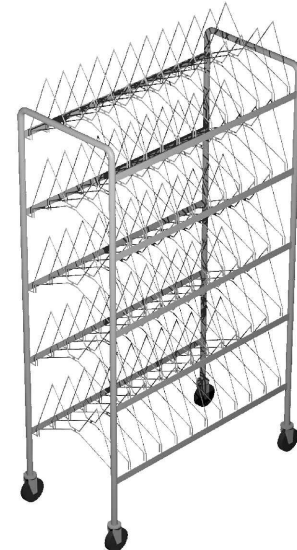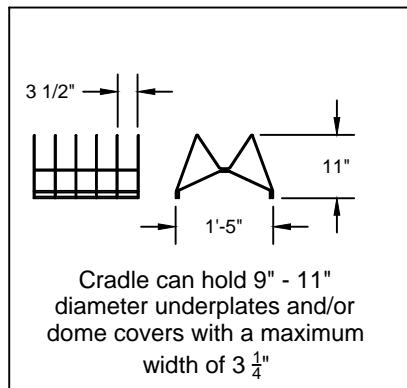

T-545
Capacity:
300 underplates
100 dome covers
Height = 6' 1-3/4"

General Specifications

Mega-Temp Rack Caddy to be Caddy Corporation model T-_____.

Frame to be of 1" O.D. 16 gauge stainless steel tubing with 3/8" diameter stainless steel rod supports. Angle frames supporting cradles to be 12 gauge stainless steel all welded and polished construction. Set of two removable cradles for each shelf to be of welded 3/16" diameter rod entirely plastic finished. Clearance between cradles to be 3-5/16" and clearance between shelves to be 12-3/16". Casters to be 4" diameter heavy-duty swivel type casters with 3/4" stems and polyurethane tires. Two diagonal casters to have foot brakes.

Unit to be provided with the following accessories:

Accessories

- ☐ **ACC-38** - Circular bumpers. (Add 4" to length and width)
- ☐ **ACC-26*** - Extra plastic cradle



* Two required per shelf

**CADDY CORPORATION**



509 Sharptown Road P.O. Box 345
Bridgeport, NJ 08014-0345
Tel: 856-467-4222 Fax: 856-467-5511
internet: www.caddycorp.com

**Bussing Caddys for
dishes, silver, glasses, tray, and refuse**

- Saves time • Saves labor
- Provides faster entry to dishwashing machine



T-209

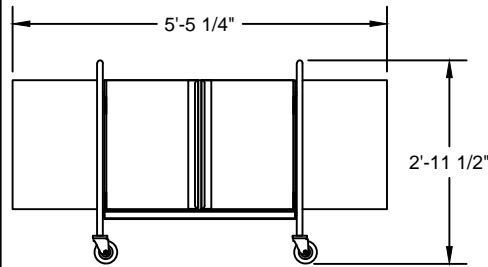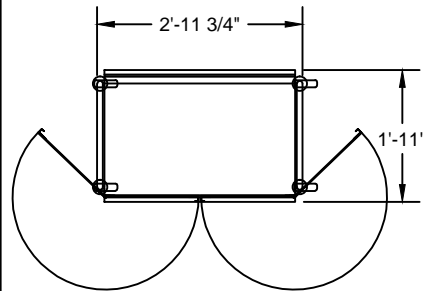

T-214

**General Specifications**

Bussing Caddy to be Caddy Corporation model T-209.

Frame to be of 1" O.D. 16 gauge stainless steel. Unit to have three shelves of 18 gauge stainless steel with raised rounded edges on all sides, flanged down to form a 1-1/2" wide channel. Shelf corners shaped to fit contour of tubular frame and continuously welded to each leg at all contact points which eliminates unsanitary crevices. Casters to be 4" diameter heavy-duty swivel type with 3/4" stems and polyurethane tires.

Unit to include two 15" x 20" x 5" plastic dish boxes (PL-1520), one 10" x 18" cutlery pan, one 20" x 20" x 1-1/2" stainless steel glass rack tray, and one 15-1/2" x 6-1/2" x 16" removable stainless steel refuse container.

Unit to be provided with the following accessories:

Accessories

- ☐ **ACC-38** - Circular bumpers. (Add 4" to length and width)
- ☐ **ACC-41** - Caster brakes on two diagonal casters.

General Specifications

Bussing Caddy to be Caddy Corporation model T-214.

Unit to be constructed of 16 gauge stainless steel with rounded coved corner interior and two 18 gauge stainless steel shelves. Frame to be 1" O.D. 16 gauge stainless steel tubing and fitted with 4" diameter heavy-duty swivel type casters with 3/4" stems and polyurethane tires. Stainless steel spacers to be between tubular frame and body to eliminate dirt pockets. Front and back to have continuous neoprene bumpers set into stainless steel channel frames. All stainless steel to be type 304 with No. 4 finish and be all welded construction. Front to have two hinged acrylic plate doors with full height stainless steel pull handles and magnetic catch latch.


Unit to be provided with the following accessories:

Accessories


- ☐ **ACC-38** - Circular bumpers. (Add 4" to length and width)
- ☐ **ACC-41** - Caster brakes on two diagonal casters.

**CADDY CORPORATION**

509 Sharptown Road P.O. Box 345
Bridgeport, NJ 08014-0345
Tel: 856-467-4222 Fax: 856-467-5511
internet: www.caddycorp.com

**Transfer and Storage Caddys
for Racks and Trays**


T-20



T-25



T-40



T-45



Dimensions				
Model	Length	Width	Height	Rack/Tray
T-20	26 $\frac{1}{2}$ "	26 $\frac{1}{2}$ "	29 $\frac{1}{4}$ "	20" x 20"
T-25	47 $\frac{1}{2}$ "	26 $\frac{1}{2}$ "	29 $\frac{1}{4}$ "	20" x 20" *
T-40	21 $\frac{1}{2}$ "	26 $\frac{1}{2}$ "	29 $\frac{1}{4}$ "	15" x 20"
T-45	29 $\frac{1}{2}$ "	24 $\frac{1}{2}$ "	29 $\frac{1}{4}$ "	16" x 22"

* Accommodates two stacks

General Specifications



Rack and/or Tray Caddy to be Caddy Corporation model T-_____.

Frame to be of 1" O.D. 16 gauge stainless steel. Shelf to be 8" (T-25 to be 10") above the floor, of 18 gauge stainless steel with raised rounded edges on all sides, flanged down to form a 1-1/2" wide channel. Shelf corners shaped to fit contour of tubular frame and continuously welded to each leg at all contact points which eliminates unsanitary crevices. Casters to be 4" diameter heavy-duty swivel type with 3/4" stems and polyurethane tires. Tubular frame to be fitted with 4 circular bumpers.

Unit to be provided with the following accessories:

Accessories

☐ **ACC-41** - Caster brakes on two diagonal casters.

**T-50 Rack Caddy can accommodate up to
five racks of cups glasses or bowls.**

T-50

Dimensions				
Model	Length	Width	Height	Rack
T-50	22 $\frac{1}{2}$ "	21 $\frac{1}{2}$ "	34 $\frac{3}{4}$ "	20" x 20"

General Specifications

Rack Caddy to be Caddy Corporation model T-50.

Frame to be of 1" O.D. 16 gauge stainless steel. Rack slides to be 14 gauge 1-1/2" x 1-1/2" stainless steel angles mounted on back and both sides. Rack slides to be continuously welded to each leg at all contact points which eliminates unsanitary crevices. Casters to be 4" diameter heavy-duty swivel type with 3/4" stems and polyurethane tires.

Unit to be provided with the following accessories:

Accessories

☐ **ACC-38** - Circular bumpers. (Add 4" to length and width)

**CADDY CORPORATION**

509 Sharptown Road P.O. Box 345
Bridgeport, NJ 08014-0345
Tel: 856-467-4222 Fax: 856-467-5511
internet: www.caddycorp.com

**Transfer and Storage Caddys
for Racks and Trays**

PROJECT:

LOCATION:



T-201-A



T-201-A-LB



T-201-B

Dimensions				
Model	Length	Width	Height	Trays
T-201-A	33"	21"	34 $\frac{3}{4}$ "	14" x 18"
T-201-A-LB	33"	21"	24 $\frac{3}{4}$ "	14" x 18"
T-201-B	37"	25"	34 $\frac{3}{4}$ "	16" x 22"

General Specifications


Rack and/or Tray Caddy to be Caddy Corporation model T-_____.

Frame to be of 1" O.D. 16 gauge stainless steel. Shelf to be 8" above the floor, of 18 gauge stainless steel with raised rounded edges on all sides, flanged down to form a 1-1/2" wide channel. Shelf corners shaped to fit contour of tubular frame and continuously welded to each leg at all contact points which eliminates unsanitary crevices. Casters to be 4" diameter heavy-duty swivel type with 3/4" stems and polyurethane tires.

Unit to be provided with the following accessories:

Accessories

- ☐ **ACC-38** - Circular bumpers. (Add 4" to length and width)
- ☐ **ACC-41** - Caster brakes on two diagonal casters.



T-22



Dimensions				
Model	Length	Width	Height	Rack
T-22	22 $\frac{1}{4}$ "	22 $\frac{1}{4}$ "	8"	20" x 20"

General Specifications

Rack and/or tray Caddy to be Caddy Corporation model T-22.

Frame to be 14 gauge stainless steel angles. Casters to be 4" diameter heavy-duty platform swivel type with polyurethane tires.

Unit to be provided with the following accessories:

Accessories

- ☐ **ACC-50** - Perimeter bumpers with replaceable corner bumpers. (Add 1-1/4" to length and width)
- ☐ **ACC-52** - Vertical corner bumpers only. Easy to replace. (Add 1-1/4" to length and width)

**CADDY CORPORATION**

509 Sharptown Road P.O. Box 345
Bridgeport, NJ 08014-0345
Tel: 856-467-4222 Fax: 856-467-5511
internet: www.caddycorp.com