



CADDY CORPORATION

Food Service Equipment

Air Systems

Hot Food Caddys



Hot Food Caddys

Open or Heated Base / Regular or Slimline



Unit to be provided with the following accessories:
(excluding TF-616 & TF-636 units)

Accessories

Folding Tray Slide - To be 1" square 16 gauge stainless steel tubing, 10" overall width, welded to intermediate lateral supports and mounted on control side on folding brackets. Slide to be removable.

	2 Well	3 Well	4 Well
26" wide units	<input type="checkbox"/> A-68	<input type="checkbox"/> A-69	<input type="checkbox"/> A-70
18" wide units	<input type="checkbox"/> A-88	<input type="checkbox"/> A-89	

Folding Work Shelf - 16 gauge stainless steel with all edges turned down and welded corners, 10" overall width, mounted on control side on folding brackets. Shelf to be removable.

	2 Well	3 Well	4 Well
26" wide units	<input type="checkbox"/> A-72	<input type="checkbox"/> A-73	<input type="checkbox"/> A-74
18" wide units	<input type="checkbox"/> A-90	<input type="checkbox"/> A-91	

Infrared Warmer* - High intensity infrared elements recessed in overhead enclosure 10" x 3" deep. Enclosure supported at both ends by 1-1/4" square tubular upright. Furnished with pilot light and on/off switch. Infrared Warmer compensates for surface heat loss.

	2 Well	3 Well	4 Well
26" wide units	<input type="checkbox"/> A-1 800 Watts	<input type="checkbox"/> A-2 1100 Watts	<input type="checkbox"/> A-3 1400 Watts
18" wide units	<input type="checkbox"/> A-2 1100 Watts	<input type="checkbox"/> A-3 1725Watts	

Undershelf** - To be 18 gauge stainless steel with channel reinforced longitudinal edges, located 7" above floor and secured to pedestals at both ends.

	2 Well	3 Well	4 Well
26" wide units	<input type="checkbox"/> A-92	<input type="checkbox"/> A-93	<input type="checkbox"/> A-94
18" wide units	<input type="checkbox"/> A-95	<input type="checkbox"/> A-96	

Overshelf - To be 16 gauge stainless steel, 10" wide with channel edges. Supports to be 1" x 1/4" flat bar. Shelf to be located rear of unit 15" above work top.

	2 Well	3 Well	4 Well
26" wide units	<input type="checkbox"/> A-64	<input type="checkbox"/> A-65	<input type="checkbox"/> A-66
18" wide units	<input type="checkbox"/> A-86	<input type="checkbox"/> A-87	

Sneeze Protector*** - To be 3/16" clear polycarbonate plastic, suspended from 16 gauge stainless steel overshelf.

	2 Well	3 Well	4 Well
26" wide units	<input type="checkbox"/> A-60	<input type="checkbox"/> A-61	<input type="checkbox"/> A-62
18" wide units	<input type="checkbox"/> A-84	<input type="checkbox"/> A-85	

Extra Outlet**** - To be located on lower portion of end panel opposite electric supply cord. Fused outlet to be 2 pole with ground prong.

A-6 - 10 Amp for 120 volts
 A-7 - 6 Amp for 240 volts

Push Handle - To be 1" O.D. 16 gauge stainless steel tubing with two 16 gauge stainless steel support brackets and 3" neoprene donut bumpers. Specify which end, when facing control panel, at time of order.

26" wide units A-15
 18" wide units A-16

ACC-52 - Vertical corner bumpers only. Easy to replace.
 (Add 1-1/4" to length and width)

TF-616 & TF-636 units to be provided with the following accessories:

Accessories

Infrared Warmer* - High intensity infrared elements recessed in overhead enclosure 10" x 3" deep. Enclosure supported at both ends by 1-1/4" square tubular upright. Furnished with pilot light and on/off switch. Infrared Warmer compensates for surface heat loss.

	3 Well
33" wide units	<input type="checkbox"/> A-3 1725Watts

Extra Outlet**** - To be located on lower portion of end panel opposite electric supply cord. Fused outlet to be 2 pole with ground prong.

A-6 - 10 Amp for 120 volts
 A-7 - 6 Amp for 240 volts

Push Handle - To be 1" O.D. 16 gauge stainless steel tubing with two 16 ga. stainless steel support brackets and 3" neoprene donut bumpers. Specify which end, when facing control panel, at time of order.

33" wide units A-13

Bumpers

ACC-52 - Vertical corner bumpers only. Easy to replace.
 (Add 1-1/4" to length and width)

Drains

A-98 - Manifold Welded Copper Drains to Ball Valve.

* Not available with sneeze protector
 ** For open base models only.

*** Includes overshelf.
 **** One outlet per unit only.




Hot Food Caddys


Open or Heated Base / Regular or Slimline




TOP VIEW


 TF-602
TF-622

TOP VIEW


 TF-603
TF-623

TOP VIEW


 TF-604
TF-624


TF-602



TF-603



TF-604



TF-622




TF-623




TF-624

TOP VIEW


 TF-605
TF-625

TOP VIEW


 TF-606
TF-626


TF-605



TF-606




TF-625




TF-626

TOP VIEW


 TF-612
TF-632

TOP VIEW


 TF-613
TF-633

TOP VIEW


 TF-614
TF-634


TF-612



TF-613



TF-614



TF-632



TF-633



TF-634

Dimensions

	Model	Length	Width	Height
Two Well Units	TF-602	37"	26"	34"
	TF-612	53"	18"	34"
	TF-622	37"	26"	34"
	TF-632	53"	18"	34"
Three Well Units	TF-603	52"	26"	34"
	TF-613	76"	18"	34"
	TF-623	52"	26"	34"
Four Well Units	TF-604	67"	26"	34"
	TF-614	99"	18"	34"
	TF-624	67"	26"	34"
Five Well	TF-605	82"	26"	34"
	TF-625	82"	26"	34"
Six Well	TF-606	97"	26"	34"
	TF-626	97"	26"	34"

☼ Denotes location of heated compartment when applicable

CADDY CORPORATION
 509 Sharptown Road P.O. Box 345
 Bridgeport, NJ 08014-0345
 Tel: 856-467-4222 Fax: 856-467-5511
 internet: www.caddycorp.com




Hot Food Caddys

Open or Heated Base / Regular or Slimline





TOP VIEW


 TF-613-L
TF-613R*

 TF-633-L
TF-633-R*

TOP VIEW




TF-616



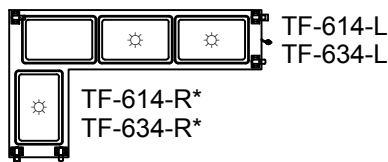
TF-636

TOP VIEW


 TF-604-L
TF-604R*

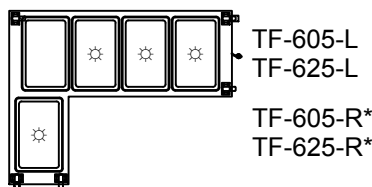
 TF-624-L
TF-624-R*

TOP VIEW


 TF-614-L
TF-614R*


 TF-634-L
TF-634-R*

TOP VIEW


 TF-605-L
TF-605R*

 TF-625-L
TF-625-R*

TOP VIEW


 TF-603-L
TF-603R*

 TF-623-L
TF-623-R*

Dimensions

	Model	Length	Width	Height
Three Well Units	TF-603-L	37"	52 ¹ / ₄ "	34"
	TF-603-R	37"	52 ¹ / ₄ "	34"
	TF-613-L	53"	44 ³ / ₈ "	34"
	TF-613-R	53"	44 ³ / ₈ "	34"
	TF-623-L	37"	52 ¹ / ₄ "	34"
	TF-623-R	37"	52 ¹ / ₄ "	34"
	TF-633-L	53"	44 ³ / ₈ "	34"
Four Well Units	TF-604-L	52"	52 ¹ / ₄ "	34"
	TF-604-R	52"	52 ¹ / ₄ "	34"
	TF-614-L	76"	44 ³ / ₈ "	34"
	TF-614-R	76"	44 ³ / ₈ "	34"
	TF-624-L	52"	52 ¹ / ₄ "	34"
	TF-624-R	52"	52 ¹ / ₄ "	34"
	TF-634-L	76"	44 ³ / ₈ "	34"
Five Well Units	TF-605-L	67"	52 ¹ / ₄ "	34"
	TF-605-R	67"	52 ¹ / ₄ "	34"
	TF-615-L	76"	51 ¹ / ₂ "	34"
	TF-615-R	76"	51 ¹ / ₂ "	34"
	TF-625-L	67"	52 ¹ / ₄ "	34"
	TF-625-R	67"	52 ¹ / ₄ "	34"
	TF-635-L	76"	51 ¹ / ₂ "	34"
Six Well	TF-616	76"	33"	34"
	TF-636	76"	33"	34"

* Right hand model is a mirror image of the model shown
 ✧ Denotes location of heated compartment when applicable

CADDY CORPORATION
 509 Sharptown Road P.O. Box 345
 Bridgeport, NJ 08014-0345
 Tel: 856-467-4222 Fax: 856-467-5511
 internet: www.caddycorp.com




Hot Food Caddys

Open or Heated Base / Regular or Slimline



TOP VIEW



TF-613-L
TF-633-L

TF-613-R*
TF-633-R*




TF-613-L
TF-613-R*



TF-633-L
TF-633-R*

TOP VIEW



TF-614-L
TF-634-L

TF-614-R*
TF-634-R*




TF-614-L
TF-614-R*



TF-634-L
TF-634-R*

TOP VIEW



TF-615-L
TF-635-L

TF-615-R*
TF-635-R*




TF-615-L
TF-615-R*



TF-635-L
TF-635-R*

TOP VIEW




TF-615-U
TF-635-U



TF-615-U

TOP VIEW



TF-606-U
TF-626-U



TF-606-U



TF-635-U



TF-626-U

Dimensions

	Model	Length	Width	Height
Three Well Units	TF-613-L	53"	36 $\frac{1}{2}$ "	34"
	TF-613-R	53"	36 $\frac{1}{2}$ "	34"
	TF-633-L	53"	36 $\frac{1}{2}$ "	34"
	TF-633-R	53"	36 $\frac{1}{2}$ "	34"
Four Well Units	TF-614-L	53"	36 $\frac{1}{2}$ "	34"
	TF-614-R	53"	36 $\frac{1}{2}$ "	34"
	TF-634-L	53"	36 $\frac{1}{2}$ "	34"
	TF-634-R	53"	36 $\frac{1}{2}$ "	34"
Five Well Units	TF-615-L	76"	51 $\frac{1}{2}$ "	34"
	TF-615-R	76"	51 $\frac{1}{2}$ "	34"
	TF-615-U	76"	44 $\frac{3}{8}$ "	34"
	TF-635-L	76"	51 $\frac{1}{2}$ "	34"
	TF-635-R	76"	51 $\frac{1}{2}$ "	34"
	TF-635-U	76"	44 $\frac{3}{8}$ "	34"
Six Well	TF-606-U	67"	52 $\frac{1}{4}$ "	34"
	TF-626-U	67"	52 $\frac{1}{4}$ "	34"

* Right hand model is a mirror image of the model shown
 ☼ Denotes location of heated compartment when applicable



Hot Food Caddys

Open or Heated Base / Regular or Slimline



TF-602, TF-612				
		Base Unit	-A6	-A7
Volts	φ	Amp	Amp	Amp
208	1	11.4		17.4
240		10.0		16.0
120/208			21.4	
120/240			20.0	
208	3			6.9
240				6.8
120/208			13.3	
120/240			12.9	

TF-603, 603-L, 603-R, 613, 613-L, 613-R, 613-L-R, 613-R-R				
		Base Unit	-A6	-A7
Volts	φ	Amp	Amp	Amp
208	1	17.3		23.3
240		15.00		21.0
120/208			27.3	
120/240			25.0	
208	3	14.7		12.4
240		12.9		11.7
120/208			12.6	
120/240			10.8	

TF-604, 604-L, 604-R, 614, 614-L, 614-R, 614-L-R, 614-R-R				
		Base Unit	-A6	-A7
Volts	φ	Amp	Amp	Amp
208	1	23.0		29.0
240		20.0		26.0
120/208			33.8	
120/240			30.0	
208	3	18.3		15.4
240		15.8		13.3
120/208			18.3	
120/240			15.7	

TF-605, 605-L, 605-R, 615-L, 615-R, 615-U				
		Base Unit	-A6	-A7
Volts	φ	Amp	Amp	Amp
208	1	28.8		34.8
240		25.0		31.0
120/208			38.8	
120/240			35.0	
208	3	15.7		14.0
240		13.6		12.5
120/208			20.0	
120/240			18.6	

TF-606, 606-U, 616				
		Base Unit	-A6	-A7
Volts	φ	Amp	Amp	Amp
208	1	34.6		
240		30.0		
120/208				
120/240				
208	3	17.2		21.7
240		13.6		19.6
120/208			25.6	
120/240			23.6	

TF-622				
		Base Unit	-A6	-A7
Volts	φ	Amp	Amp	Amp
208	1	13.9		19.9
240		13.0		19.0
120/208			23.9	
120/240			23.0	
208	3	7.9		9.2
240		6.6		9.8
120/208			13.3	
120/240			17.1	

TF-623, 623-L, 623-R				
		Base Unit	-A6	-A7
Volts	φ	Amp	Amp	Amp
208	1	20.9		26.9
240		19.5		25.5
120/208			30.9	
120/240			29.5	
208	3	13.0		15.0
240		11.0		14.2
120/208			13.6	
120/240			17.8	

TF-624, 624-L, 624-R, 634, 634-L, 634-R, 634-L-R, 634-R-R				
		Base Unit	-A6	-A7
Volts	φ	Amp	Amp	Amp
208	1	27.8		33.8
240		26.0		32.0
120/208			37.8	
120/240			36.0	
208	3	15.2		13.9
240		14.7		13.1
120/208			18.2	
120/240			19.7	

TF-625, 625-L, 625-R, 635-L, 635-R				
		Base Unit	-A6	-A7
Volts	φ	Amp	Amp	Amp
208	1	34.8		
240		32.5		
120/208				
120/240				
208	3	21.5		23.0
240		23.0		24.0
120/208			23.5	
120/240			24.7	

